

DHI-HY-1711

Encoder



- Low power consumption, energy saving
- Wide range of power supply options, supporting both battery and USB power
- Dedicated functional keys for reading and writing address, quick and easy to operate

System Overview

DHI-HY-1711 Encoder is designed to read/write logic address of smoke detector, heat detector, addressable manual call point, addressable modules, repeater panel and sounder strobe. It is convenient to bring in the work place and easy to operate.

Functions

Automatic Encoding Function

Automatically address +1 when addressing devices consecutively.

Ultra-low Consumption and Auto Power-off

If stop encoding for 5 seconds, the LCD display will turn off and enter the sleep mode. If stop encoding for 3 minutes, it will automatically shut down for longer battery lifespan.

Portable and Miniature Design

Easy to carry and operate, flexible in use.

Functional Keys with Sound

Press any key to light up the LCD screen.

LCD Display

Intuitive and user-friendly screen to write/read address. LCD backlight function enables users to operate in dark environments.


Success Reminder Function

After writing the address successfully, there will be a "Di" tone. If the writing fails, "9999" is displayed.

Technical Specification

Model	DHI-HY-1711
Working Power	AA Alkaline Battery *4/ Micro USB link for power supply
Current	Monitoring current: ≤ 1.5mA Operating current: ≤ 60mA
Operating Temperature	-10°C to +55°C (+14°F to +131°F)
Storage Temperature	-20°C to +65°C (-4°F to +149°F)
Operating Humidity	≤ 95% RH (no condensation)
Color	White
Dimensions	76.5 mm × 164.0 mm × 28.2 mm (3.01" × 6.46" × 1.11")
Weight	167 g (0.37 lb)

Dimensions (mm/inch)

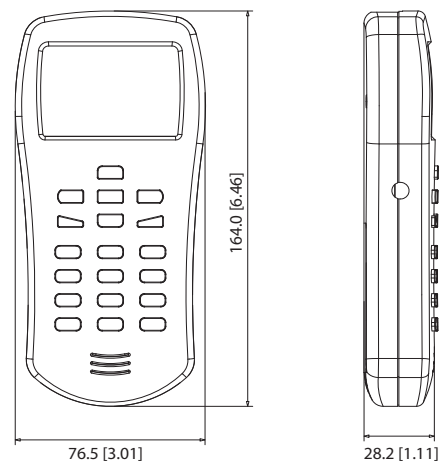

Ordering Information

Type	Part Number	Description
Encoder	DHI-HY-1711	Encoder