


DHI-VT07521G

8 Inch Digital Outdoor Station



- Anodized aluminium alloy middle frame
- 8 inch capacitive touch screen and high definition IPS screen; resolution: 800 (H)×1280 (V)
- Password and card unlock
- Full duplex communication
- Outdoor stations can be managed through the platform; voice communication between mobile app and platform
- 2 MP low illuminance wide dynamic dual camera; white light fill light and IR fill light, fill light brightness can be adjusted
- Support duress alarm, tamper alarm, and fire alarm
- IP66; IK07
- Surface mount and flush mount

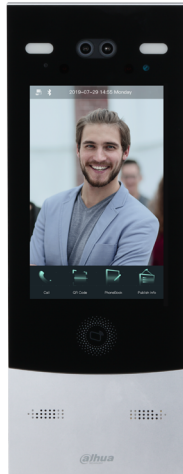

Technical Specification

System

Main Processor	Embedded processor
Internet Protocol	IPv4, FTP, DNS, RTSP, RTP, TCP, UDP, SIP
Keyboard Type	Touch keyboard

Basic

Appearance	G series
Display	High definition IPS screen
Screen Type	Capacitive touch screen
Resolution	800(H)×1280(V)
Camera	2 MP CMOS
WDR	120dB
Light Compensation	Auto white light fill light Auto IR light fill light
Status Indicator	1, blue-operation status
Voice Prompt	Yes
Housing Material	AL+PC+ABS

Function

Unlock Mode	Remote/password/card unlock
-------------	-----------------------------

Online Update	Yes
Full Duplex Communication	Yes
Snapshot When Unlocking Doors	Yes
Leave Photos and Messages	Yes
Web Configuration	Yes
Motion Detection	Video motion detection
Issue Card Locally	Yes
Auto-Registration	Yes

Performance


Card Capacity	10,000
---------------	--------

Port


RS-485	1
Wiegand	1
Ethernet	1 10M/100M/1000M Ethernet port
Alarm Output	2 (Dry contact)
Alarm Linkage	Yes
Power Output	1 DC 12V/100ma
Exit Button	1

Door Status Detection	1
Lock Control	1, normally on or off by default
Alarm	
Tamper Alarm	Yes
Duress Alarm	Yes
Door Sensor Timeout	Yes
Regular	
Power Supply	Optional
Power Supply Mode	DC 12V/2A
Power Consumption	≤24.0W
Product Dimensions	389mm×145mm×43mm (15.31"×5.71"×1.69")
Packaging Dimensions	413mm×182mm×104mm (16.26"×7.17"×4.09")
Operating Temperature	-20°C to +60°C (-4°F to +140°F)
Operating Humidity	10%RH–90%RH
Operating Altitude	86kPa to 106kPa
Gross Weight	1.91kg(4.21 lb)
Accessory	Mount plate
Installation Method	Surface mount and flush mount
Operating Environment	Outdoors

Dimensions (mm[inch])

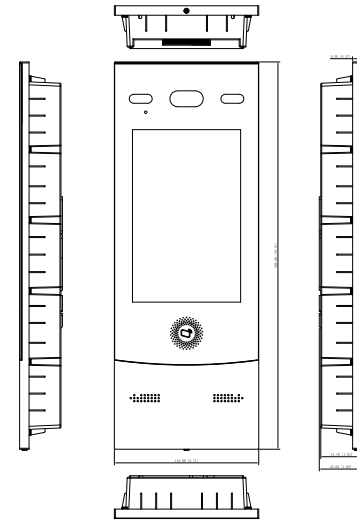

Application

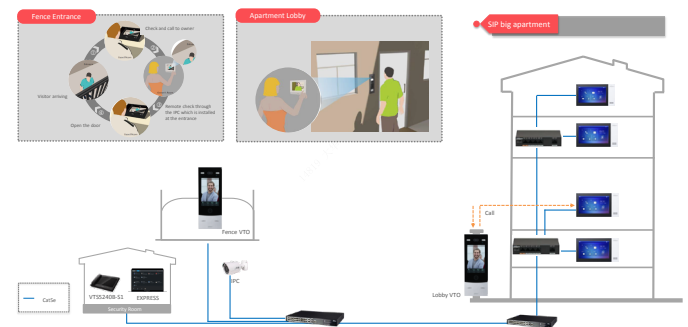

Ordering Information

Type	Model	Description
Outdoor Station	DHI-VT07521G	8 Inch Digital Outdoor Station VT075X1G
Surface Mount Plate	VTM120	Installation plate for 8 inch Digital Face Recognition Outdoor Station VT075X1G (Used when the outdoor station is installed on the wall)
Flush Mount Plate	VTM121	Installation plate for 8 inch Digital Face Recognition Outdoor Station VT075X1G (Used when the outdoor station is installed in the wall)