

VTO6210B-S1/BW-S1

IP Villa Outdoor Station



Features

- HD CMOS camera
- Tempered glass panel, IP65 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)
- Night vision & Voice indication
- Video & Audio messaging
- Remote intercom with mobile APP
- Surface mounted



Technical Specification

Model	VTO6210B-S1/BW-S1
-------	-------------------

System

Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS

Video

Video Compression	H.264
Image Sensor	1/4" 1MP CMOS
Lens	3.6mm
Angle of View	H:60°, V:42°, D:70°
Day/Night	Color Image

Audio

Audio Compression	G.711
Audio Input	Omnidirectional Mic
Audio Output	Built-in Speaker
Bidirectional Talk	Support Dual-way Bidirectional talk

Operation Mode

Keypad	Single Touch Button
Reader	Mifare Card

Interface

Door Control	2(1 relay out for main lock, 1 extended by access control module)
Alarm In	2(1ch unlock button, 1ch feedback)
RS485	1

Network


Ethernet	10M/100Mbps Self-adaptive
----------	---------------------------

Network Protocol	TCP/IP
------------------	--------


General

Ingress Protection	IP65 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)
Tamper Switch	1
Installation	Surface
Material	Tempered Glass
Power	DC 12V
Power Consumption	Work ≤10W
Working Temperature	-30°C to +60°C
Relative Humidity	10%RH-90%RH
Dimensions	154.2mm×114.2mm×43.0mm
Weight	0.6kg

Dimensions

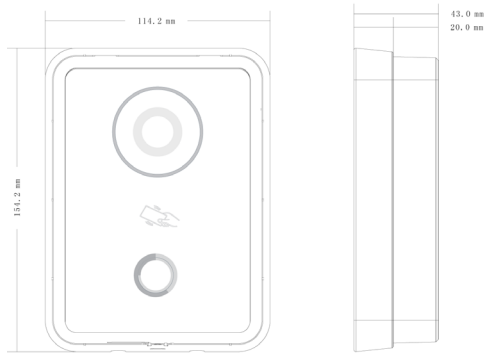

View Area

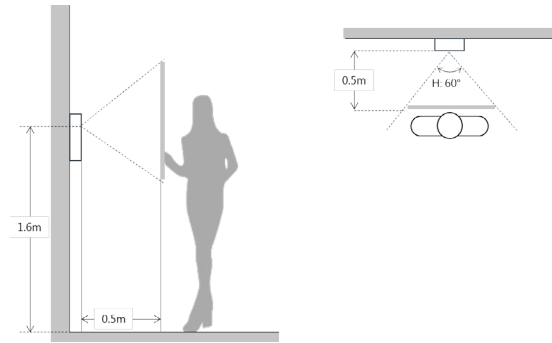

Application

