

## DSP5211L/DSP5211CL

### 10W Ceiling Speaker



#### Description

The DSP5211L/DSP5211CL Ceiling Speaker is a coaxial dual-frequency speaker with a wide range of sound diffusion, large output power, featuring easy installation and capable of reproducing both voice and music. It's an ideal choice when you need a ceiling speaker with perfect sound quality. These speakers are widely used in settings such as schools, offices, cafes, hospitals, hotels, and shopping malls. Note that the DSP5211CL model comes with a back cover, whereas the DSP5211L does not.


#### Features

- Adopts the fashionable thin-edge planer and the carbon alloy aluminum mesh design with the
- RAL white coating so as to integrate with any indoor place perfectly.
- Equipped with a 6.5" bass unit with magnetic circuit encapsulated with special engineering plastic process, and the drum paper formed with tripping and hot pressing of algae salved organisms, for the purpose of super-strong reproduction of voice and music.
- Concentric 0.75" tweeter ,provide clear and clear treble,the diffraction of a high profile provides a broad,uniform coverage.
- It is in conformity with the IEC 268-5 power handling capacity (PHC) standard, and able to operate continuously for 100 hours and carry out simulating acoustic feedback exposure (SAFE) test. It is able to bear the double rated powers within a short period, so as to ensure the high reliability of the loudspeaker under extreme conditions, prolong the service life, and reduce the possibility of occurrence of fault or degradation of performance to a great extent.
- Powerful clip design, durable and reliable, easy to install.


# Specifications

Model	DSP5211L	DSP5211CL
Drive Units	6.5"*1, 0.75"*1	
RMS	10W	
Impedance	8Ω	
Sensitivity(1m, 1W)	93±2dB	
Max S.P.L. (1m)	103±2dB	
Freq. Res.	90Hz-18KHz	
Opening Diameter	Φ168-172mm	
Dimension	Φ190*80mm	Φ190*105mm
Weight	0.8Kg	0.9Kg


## Product Information

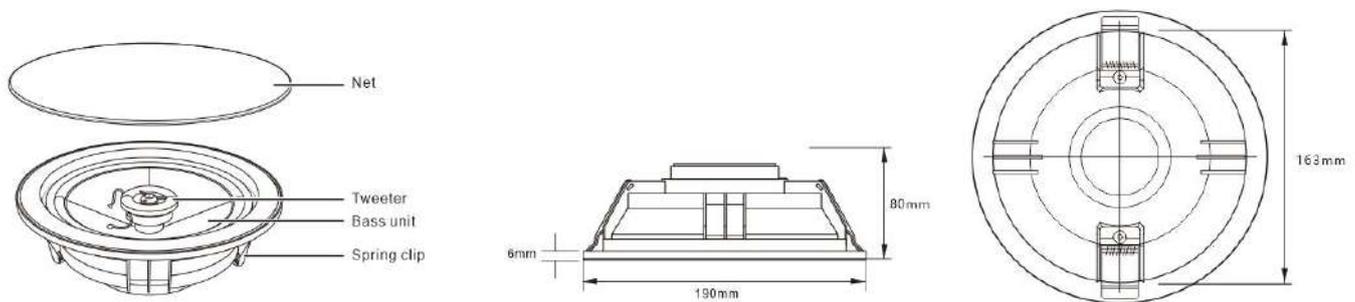


## Frequency Response Characteristics (dB SPL, 1W, 1m)

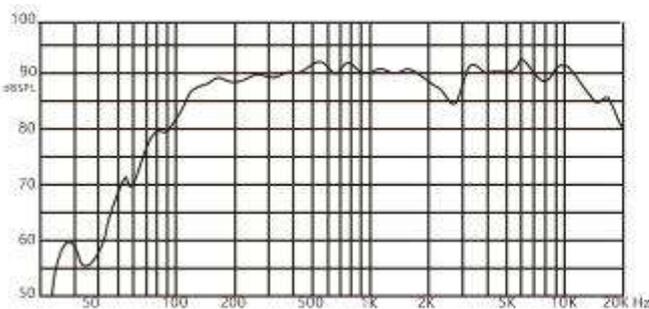

## Distortion Characteristic (THD<5% 1W, 1m, 100Hz-10kHz)

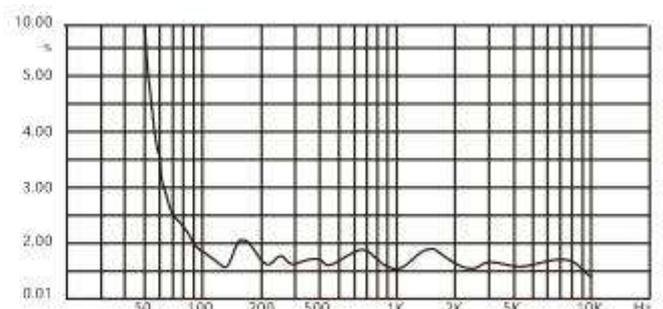

## Vertical Directivity Pattern

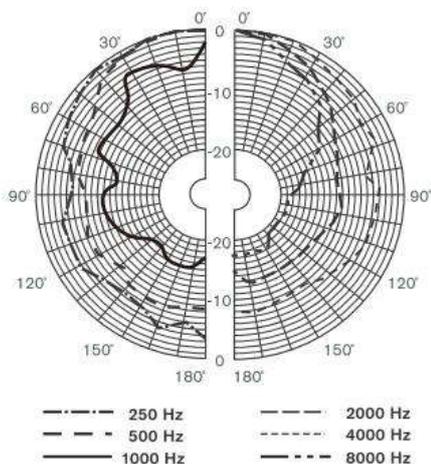

## Horizontal Directivity Pattern

