

## DSP802

### 1.5W-10W ABS Ceiling Speaker



#### Description

The DSP802 is a ceiling speaker with a 70V/100V transformer built in. The 70V/100V transmission is realized in a high-voltage, low-current mode, which makes longer distance transmission and parallel connection of multiple loudspeakers possible. The built-in 6.5" speaker driver is designed of wide frequency response 70-18,000Hz, the multiple terminals 1.5W, 3W, 5W, 6W & 10W can be applied to different occasions vary from room size and ambient noise surrounding; Its made of high quality engineering plastic, which ensures long-term durability, and will never be out of shape or fading; Spring clip clamp makes the easy and secure installation; Driver surround excellent damping, long life, clear and sonorous sound. It is an ideal choice for industrial and commercial applications in hotel, school, office and factory where background music and paging is needed.

#### Features

- Built-in 100V/70V transformer
- In-ceiling type loudspeaker
- 6.5" paper cone driver unit
- Rated power output at 1.5W-10W
- High sensitivity (92±2dB)
- ABS white engineering plastic
- Fast installation by spring clip


#### Specifications

| Model         |      | DSP802     |
|---------------|------|------------|
| Drive Units   |      | 6.5"x 1    |
| Rated Power   |      | 6W         |
| Rated Voltage | 70V  | 1.5W/3W/5W |
|               | 100V | 3W/6W/10W  |


|                      |             |
|----------------------|-------------|
| Sensitivity (1m, 1W) | 92±2dB      |
| Max. SPL(1m)         | 97±2 dB     |
| Frequency Response   | 70Hz-18kHz  |
| Installation Hole    | Φ178×Φ190mm |
| Weight               | 1.0kg       |

Product Information


FREQ. RESPONSE (dB SPL、1W、1m)

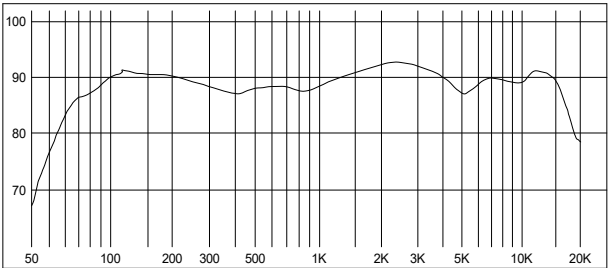

DISTORTION (THD< 1.5% 1W、1m、100Hz-10kHz)

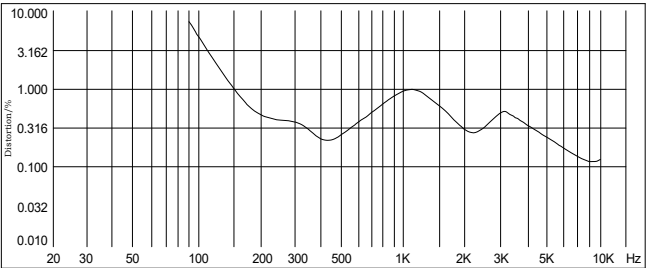

Dimensions

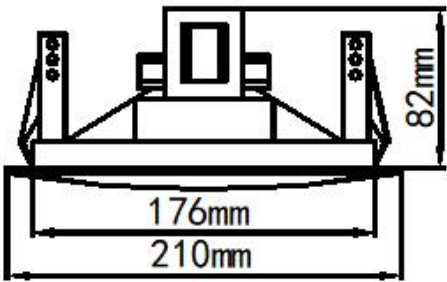

Installation Hole

