



Similar to the illustration

## grid | power VR M

Series power.com SB

### Valve regulated lead-acid batteries

#### Typical applications:

- Uninterruptible power supply (UPS)
- Telecommunications
  - Mobile phone stations
  - BTS-stations
  - Off-grid/on-grid solutions
- Power supply systems
- Emergency lighting

#### Your benefits:

- Maintenance-free regarding water refilling – due to innovative Gel-ESS technology
- Good high-current capability – low investment costs due to innovative electrode structure
- Optimal space utilization – due to horizontal arrangement
- Higher short-circuit safety even during the installation – based on HOPPECKE system connectors
- Easy assembly and installation – battery lid with integral handle\*


# Type overview **grid | power VR M**

## Capacities, dimensions and weights

Series power.com SB	Type	$C_{10}/1.80\text{ V}$ Ah	$C_5/1.75\text{ V}$ Ah	$C_3/1.70\text{ V}$ Ah	$C_1/1.70\text{ V}$ Ah	$C_{1/2}/1.65\text{ V}$ Ah	$C_{1/6}/1.65\text{ V}$ Ah	Weight kg	Length L mm	Width W mm	Height H mm	Fig.
<b>grid   power VR M 6-170</b>	<b>power.com SB 6 V 170</b>	161	149	139	115	99	71	31.8	242	170	275	A
<b>grid   power VR M 6-220</b>	<b>power.com SB 6 V 220</b>	220	184	171	142	122	85	39.6	308	170	275	A
<b>grid   power VR M 2-230</b>	<b>power.com SB 2 V 230</b>	232	216	203	167	141	93	14.5	90	183	310	B
<b>grid   power VR M 2-330</b>	<b>power.com SB 2 V 330</b>	343	322	302	251	219	146	20.9	183	129	310	C
<b>grid   power VR M 2-400</b>	<b>power.com SB 2 V 400</b>	411	382	358	298	256	178	25.2	183	155	310	D
<b>grid   power VR M 2-600</b>	<b>power.com SB 2 V 600</b>	604	562	529	447	385	263	38.0	183	226	310	E
<b>grid   power VR M 2-800</b>	<b>power.com SB 2 V 800</b>	834	777	735	601	523	333	50.3	182	304	310	F
<b>grid   power VR M 2-1000</b>	<b>power.com SB 2 V 1000</b>	1070	985	921	748	631	407	64.2	182	391	310	G


$C_{10}$ ,  $C_5$ ,  $C_3$ ,  $C_1$ ,  $C_{1/2}$  and  $C_{1/6}$  = Capacity at 10 h, 5 h, 3 h, 1 h, 1/2 h and 1/6 h discharge

Fig. A




**grid | power VR M 6-170**  
**grid | power VR M 6-220**

Fig. B




**grid | power VR M 2-230**

Fig. C




**grid | power VR M 2-330**

Fig. D




**grid | power VR M 2-400**

Fig. E




**grid | power VR M 2-600**

Fig. F

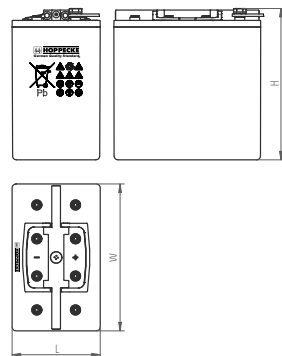

**grid | power VR M 2-800**

Fig. G

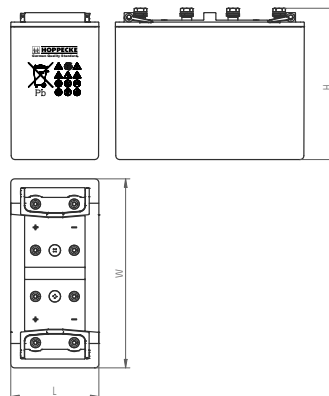

**grid | power VR M 2-1000**

Design life: up to 15 years · Eurobat classification:  $\geq 12$  years

**Optimal environmental compatibility – closed loop for recovery of materials in an accredited recycling system**

HOPPECKE Batterien GmbH & Co. KG  
 Bontkirchener Str. 1 · D - 59929 Brilon · Tel.: +49 (0) 2963 61-374 · Fax: +49 (0) 2963 61-270  
 E-Mail: [reservepower@hoppecke.com](mailto:reservepower@hoppecke.com) · [www.hoppecke.com](http://www.hoppecke.com)

