

# Imou



## Cube 4MP

### 4MP Wi-Fi Cube Camera

Cube 4MP brings 4MP live monitoring, two-way audio lets you communicate with who is at the camera remotely. PIR detection automatically sends a notification to you immediately when it detects moving target, and digital input/output port allows you to connect detectors, sensors, beepers, etc.



#### H.265 4MP QHD

See more than 1080P



#### PIR Detection

High quality passive IR detector



#### External Alarm

Digital input/output alarm port



#### Abnormal Sound Alarm

Sends alerts to your smartphone when it detects abnormal sound



#### Two-way Talk

Communicate with family and pets easily



#### 24/7 Protection

Excellent night vision, feel safe even in complete darkness



#### Diversified Storage

Supports NVR, Cloud Storage or Micro SD card (up to 256GB)





#### Wi-Fi Connection

IEEE802.11b/g/n(2.4GHz)



## Stay close with what you care

With Cloud service, you will have access to what you care as long as Internet is available. You can record daily or motion videos on Cloud and playback anytime anywhere.

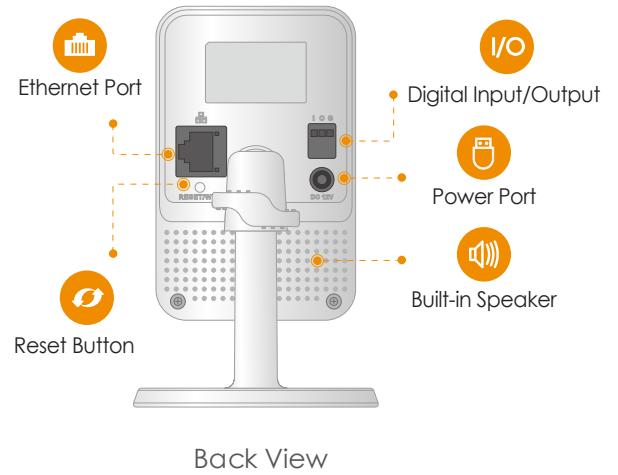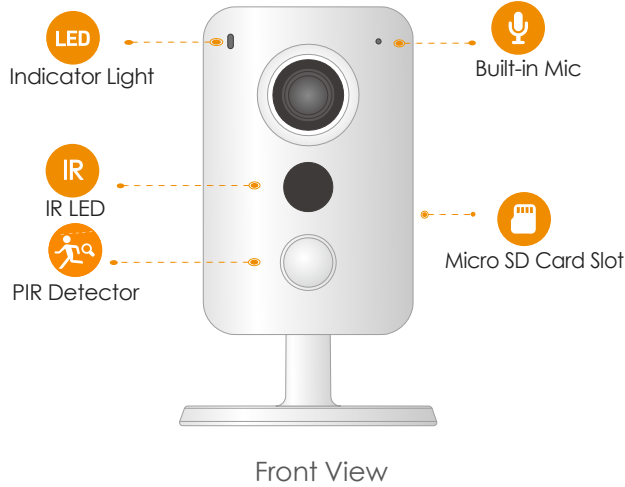

## Specifications

### Camera

1/3" 4 Megapixel Progressive CMOS  
4MP(2560 x 1440)  
Night Vision: 10m(33ft) Distance  
2.8mm Fixed Lens  
Field of View : 97° (H), 52° (V), 115° (D)

### Video & Audio

Video Compression : H.265/H.264  
Up to 25/30fps Frame Rate  
Two-way Audio

### Notice Management

Motion Detection  
Configurable Region  
Abnormal Sound Alarm  
PIR Detection

### Network

1 x 100Mbps Ethernet port  
Wi-Fi:IEEE802.11b/g/n, 50m Open Field  
imou App: iOS, Android  
CGI, Onvif

### Auxiliary Interface

Micro SD Card Slot (up to 256GB)  
Built-in Mic & Speaker  
Alarm line in/out interface  
Reset Button

### General

DC 12V1A Power Supply  
Power Consumption:<4W  
Working Environment:-10° C~+45° C, Less Than 95%RH  
Dimensions: Φ78.5× 90.5× 127.8mm (Φ3.1 × 3.6 × 5 inch)  
Weight: 310g (0.68lb)  
CE, FCC

## What's in the box

- 1x Camera
- 1x Quick Start Guide
- 1x Power Adapter
- 1x Screw Package
- 1x Installation Position Map

